



VT2.2



DPWR-600(S)




VT-Panic-LED

DPWR-600(S) Cabling

DPWR-600(S) Power Specifications Input: DC 10-32V, 2000mA Output DC5V, 2500mA

VT-Panic-LED

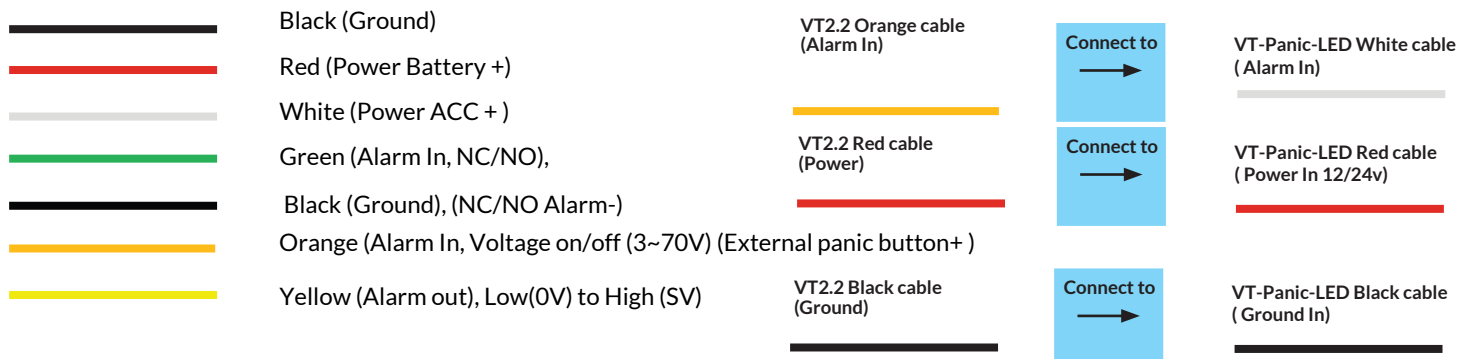

Please note as part of the installation you are required to press the calibration button on the camera.

- 1) Install the unit and park the vehicle on a flat surface.
- 2) Turn on the unit, after the unit has booted please press the calibration button for three seconds.
- 3) Once calibration is complete the unit will beep to confirm this is done.



Panic Press Activated



Panic Press Standby



Calibration button

Please note that the config tool needs to be set for Alarm 1 V-On. The LED on the VT-Panic-LED should be in a state of Green, press to change to Red which will activate the Panic button, the VT2.2 Blue led will flash to show this has worked, the VT-Panic-LED should be left in a Green state.