



VT3000-AI



VT-DSM-AI



VT670-IPC (Optional)



VT-R WATCH V2

VT3000-AI VT3000-AI (UK/EU), VT3000-AI (USA), VT3000-AI (ANZ)

AI-POWERED VEHICLE CAMERA AND SAFETY SYSTEM

VT3000-AI combines a next generation 4G vehicle camera with the power of artificial intelligence (AI). The advanced video telematics solution has been specially developed for commercial vehicle operations to help reduce fleet risk and prevent incidents before they happen. This means transport businesses can effectively improve safety by reducing the frequency and severity of collisions.

Awards:











































t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

S support.visiontrack.com



VisionTrack Copyright © 2021 - All Rights Reserved.


All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.



Using the latest Al technologies – including **Advanced Driver Assist System** (**ADAS**) and **Driver Status Monitoring (DSM)** – the **VT3000-Al** detects both hazards on the road and high-risk driver behaviours. The **ADAS** camera identifies lane departure, forward collisions and tailgating, while the **in-vehicle monitor** can recognise if a driver is tired or distracted by actions such as mobile phone use, smoking and eating. This means a driver can immediately be alerted to potential dangers, while an office-based fleet manager can monitor areas of concern both in real-time and historically.

The **VT3000-AI** can capture an additional view with an optional **digital (IP) internal or external camera** – cab, side, rear or cargo facing – for increased visibility and peace of mind. It also includes up to 512GB of internal storage capacity; optional panic alarm; and livestream and seamless playback functionality.

Key features:

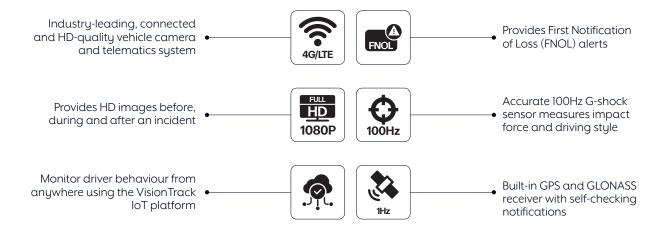

t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

S support.visiontrack.com



VisionTrack Copyright © 2021 - All Rights Reserved.

All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.



Specifications:

Network	3G/4G	Supported
Positioning	GPS	Supported
Sensor	Six-axis sensor	Supported
Serisor	SIX-UXIS SELISOI	Power on: the device is powered, the red light is always on
Working status indicator	The indicator light shows the four states of the device:	Normal operation: green light is always on
		Fault alarm: indicator red light flashes once a second
		Sleep: green light flashes 1 second and off 10 seconds
Ctorggo	SD Card	2x SD card, supports SDXC64GB/128GB/256GB
Storage		
Video & Audio	Video and Audio recording	3 channels for video and 1 channel for audio
	Resolution ratio and frame Rate of main code stream	VT3000-AI: 1080P@30fps
	Rate of main code stream	VT-DSM-AI: 960P@30fps
	Total resource	1080P@30fps+960P@30fps+720P@30fps,
		3-channel CIF@15fps
	Image setting	Brightness, colour, contrast, colour saturation
	Video coding	H.264
	Video compression rate	VT3000-AI : 500Kbps ~ 6Mbps
	Audio compression standard	ADPCM/G.711
	CBR/VBR	Supported
	Audio input	Optional (off by default)
Camera	Sensor type (VT3000-AI)	1/2.9" 2M pixel CMOS Sensor
parameters	Shutter speed	1/30sec - 1/100000sec
	Lens/FOV (field of view)	VT670-IPC: 1.98mm/150° (FOV); VT3000: 4mm/90° (FOV)
	Lens interface type	M12
	Wide dynamic range	D-WDR
	Backlight compensation	Supported
	Signal to noise ratio S/N	>48db
Interface	RS232	1 channel
	RS485	1 channel
	IO alarm input	4 channels
	IO alarm output	1 channel
	Power output	5VDC@500mA, 12VDC@500mA
Protocol	Network Protocol	HTTP, TCP, ARP, UDP, FTP, DHCP, DNS, IPV4, NTP
Power related	Power supply	9-36V
	Typical power consumption	6W (up to 12W with 12v power output option from GPIO cable)
General	Operating temperature	-30°C∼+70°C
specification	Storage temperature	-40°C~+85°C
	Humidity	0% - 90%
	/	

t +44 (0) 1246 225 745

e info@visiontrack.com


w visiontrack.com

s support.visiontrack.com







Dimensions:









VT670-IPC Front View








- **1.** MIC
- 2. Cover fixing screw
- **3.** Speaker
- 4. Camera adjustment screw
- **5.** VT3000 lens (towards outside)
- **6.** SIM/SD Card/USB cover screw
- **7.** Adhesive pad

- **t** +44 (0) 1246 225 745
- e info@visiontrack.com
- w visiontrack.com
- **s** support.visiontrack.com






Wiring Diagram:

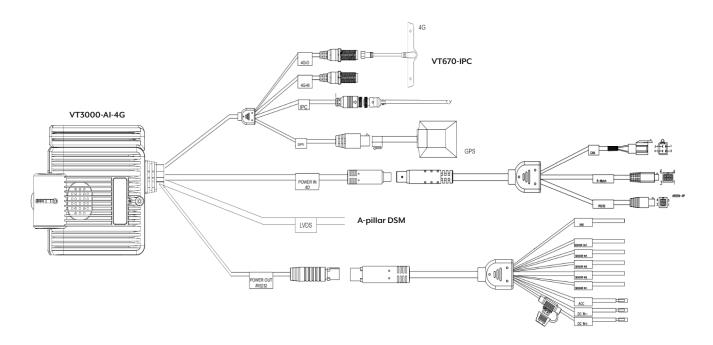

ADAS Features:



DSM Features:



t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

s support.visiontrack.com



VisionTrack Copyright © 2021 - All Rights Reserved.

All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.