

VT-C3-IPC




VT-C3-IPC

INTERNAL IP DOME CAMERA


IP HD 720p network dome camera with super-wide dynamic range (WDR) featuring crystal clear images.



Key features:

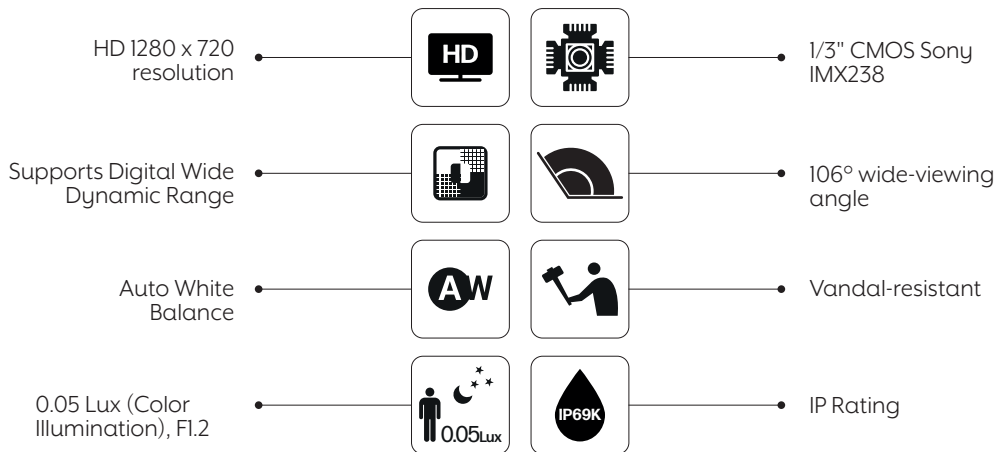

t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com

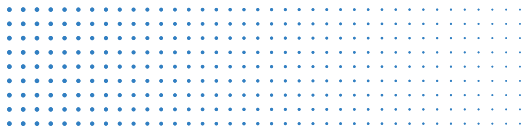

VT-C3-IPC

Specifications:

Sensor	1/3" CMOS Sony IMX238
Resolution	1280(H) x 720(V)
Signal System	50/60Hz
Minimum Illumination	0.05 Lux (Color Illumination), F1.2
Electronic Shutter	1/25 Second -1/10000 Second
Wide Dynamic Range	Digital Wide Dynamic Range
Black-light Compensation	Supports
S/N	>40db
Wide Dynamic Range	>80db
Port	6-pin DJ M12(PON)/RJ45(PoE)
Aperture	Fixed aperture F1.8
Lens	2.8mm, 4mm, 6mm, 8mm Optional
Video Compression	H.264
Compression Output Rate	768Kbps-6144Kbps
Image Resolution	Main Stream: 720p @ 30fps, Network Sub Stream: VGA @ 25fps, Record Sub Stream
CBR/VBR	Supported
Built-in Mic	Supported
Audio Compression Standard	ADPCM G.711A G.711U
Maximum Image	1280 x 720
Frame	30FPS
Image Setting	Chroma, contrast, saturation and sharpness
Network Port	RJ45/M12-4 Aviation Din, 10M/100M Adjustable Ethernet Port
Network Protocol	HTTP, TCP, ARP, RTSP, UDP, RTCP, SMTP, DHCP, DNS, DDNS, PPPoE, IPV4, UPnP, NTP
ONVIF	Supported
Client Terminal Preview	Build-in WEB server; Support IE browser
Audio Input (Optional)	Supported
PoE	Supported
Temperature	-40°C ~ + 70°C
Humidity	0% - 90%
Power Supply	PON(DC12V)/POE(DC48V)
Waterproof Class	IP66 (IP65 with audio)
Power	<2w (Day)
Dimension (mm)	90(L) x 110(W) x 53(H)

t +44 (0) 1246 225 745

e info@visiontrack.com

W visiontrack.com

S support.visiontrack.com