

## VT-MM-AHD







# VT-MM-AHD

## THREE CHANNEL MIRROR MONITOR

The **VT-MM-AHD** is a rear-view mirror-mounted full-colour monitor. With three video inputs and a resolution of 720p, this monitor is an ideal driver reversing aid.


### Key features:

			
Screen Size	Built-in Speaker	3 Channel	Remote Control

- ✓ 7-inch digital screen
- ✓ 1024 x 600 (AHD 720p)
- ✓ Remote control + keystroke
- ✓ Three video inputs, AV2/AV3 with trigger wire
- ✓ DC10V~36V
- ✓ Multi-language
- ✓ 248(L) x 106(H) x 27(D)mm



**t** +44 (0) 1246 225 745  
**e** info@visiontrack.com  
**w** visiontrack.com  
**s** support.visiontrack.com

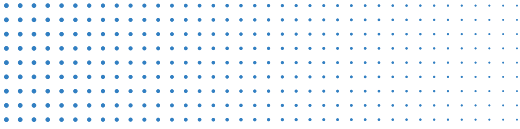


## VT-MM-AHD

### Specifications:

<b>Screen Size</b>	7-inch digital screen
<b>Resolution</b>	1024 x 600 (AHD 720p)
<b>System</b>	AUTO
<b>OSD Menu</b>	Multi-language: English etc.
	Separately adjust camera mirror/normal image:
	Separately adjust reversing image delay time 0~15s;
<b>Video Inputs</b>	3 way video inputs, 2 way trigger wires
<b>Brightness</b>	450cd/m2
<b>Contrast</b>	450:1
<b>Voltage</b>	DC12V~32V
<b>Features</b>	With reverse polarity protection;
	AV2/AV3 with trigger wires;
	Please note, when connecting the VT-MM-AHD to the VT5500/VT6.2/VT8000, there is no need to power the screen. If you are planning on connecting the VT4000 or a camera directly to the screen you will need to power the screen via the DC inputs.
<b>Operation Mode</b>	6# Remote control/Touch Keystroke

### Wiring diagram:

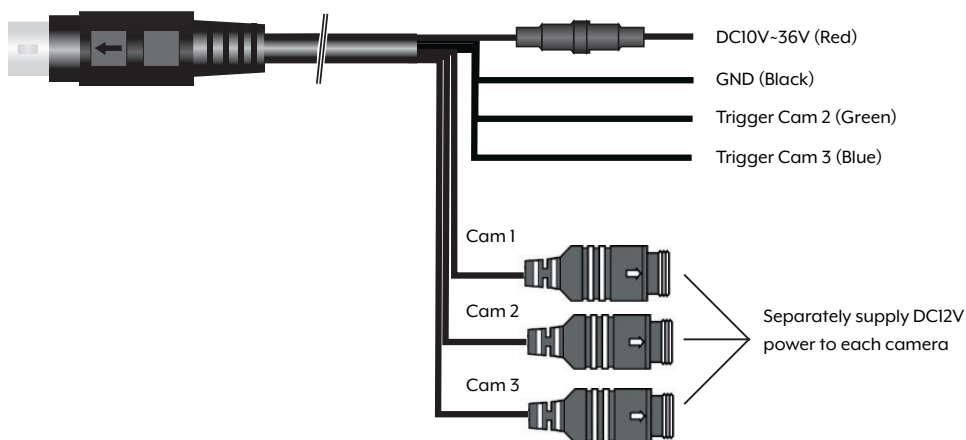

**t** +44 (0) 1246 225 745  
**e** info@visiontrack.com  
**w** visiontrack.com  
**s** support.visiontrack.com